

UB1208

Maintenance-Free



POWERSTRIDE BATTERY

Specification

Nominal Voltage	12 volts		
Nominal Capacity	77° F (25° C)		
20-hr. (0.04A)	0.80 Ah		
10-hr. (0.074A)	0.74 Ah		
5-hr. (0.136A)	0.68 Ah		
1-hr. (0.48A)	0.48 Ah		
Approximate Weight	0.75 lbs (0.3 kgs)		
Internal Resistance (approx.)	200mΩ		
Shelf Life (% of normal capacity at 77° F (25° C))			
3 Months	6 Months	12 Months	
91%	82%	64%	
Temperature Dependency of Capacity (20 hour rate)			
104° F	77° F	32° F	5° F
102%	100%	85%	65%



Charge Method (Constant Voltage)


Cycle Use (Repeating Use)

Initial Current	0.24A or smaller
Control Voltage	7.25 - 7.45 V

Float Use

Control Voltage	6.80 - 6.90 V
-----------------	---------------


Physical Dimensions: in (mm)




L: 3.78in (96.0 mm)
W: 0.98in (24.9 mm)
H: 2.44in (62.0 mm)
TH: 2.44in (32.0 mm)

Tolerances are +/- 0.04 in. (+/- 1mm) and +/- 0.08 in. (+/- 2mm) for height dimensions. All data subject to change without notice.


Terminals

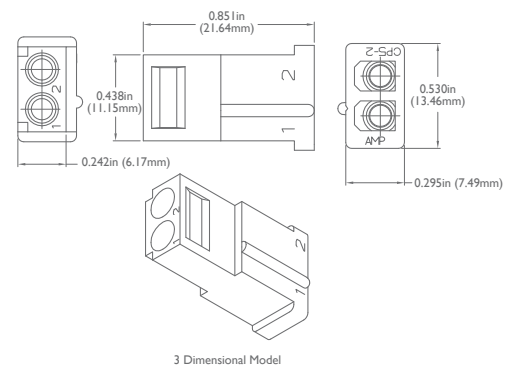


Discharge Time vs. Discharge Current

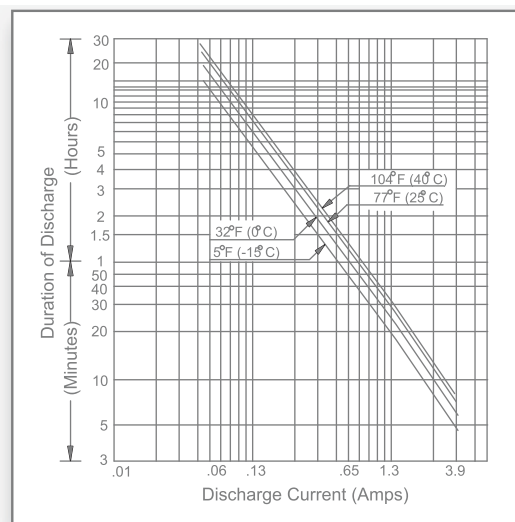


Discharge Characteristics

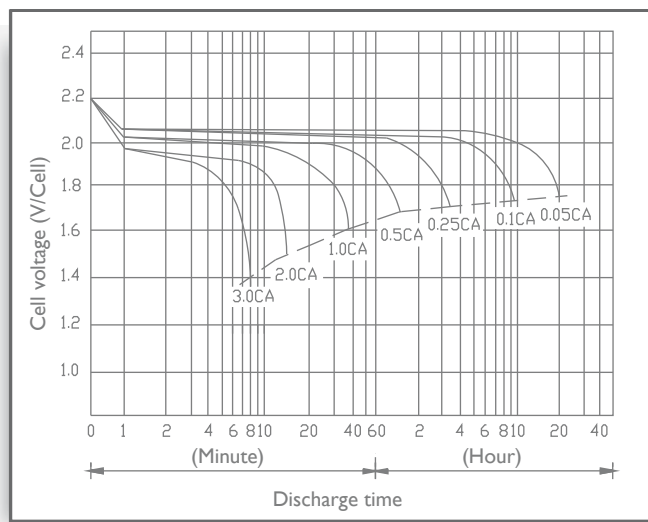


Shelf Life & Storage

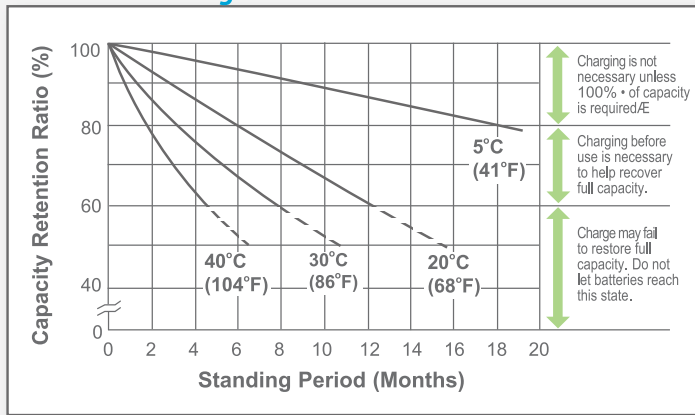


Cycle Life vs Depth of Discharge

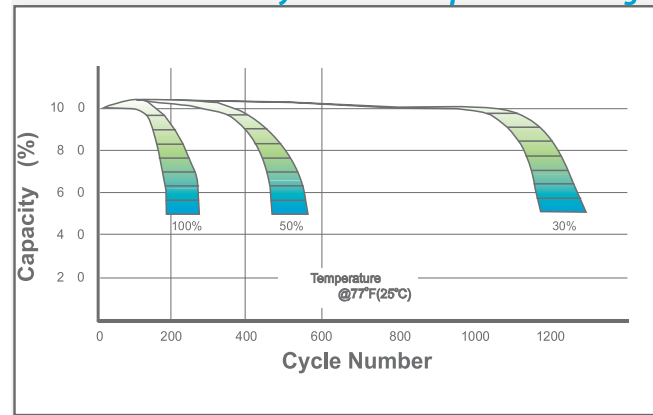

Open Circuit Voltage vs Residual Capacity

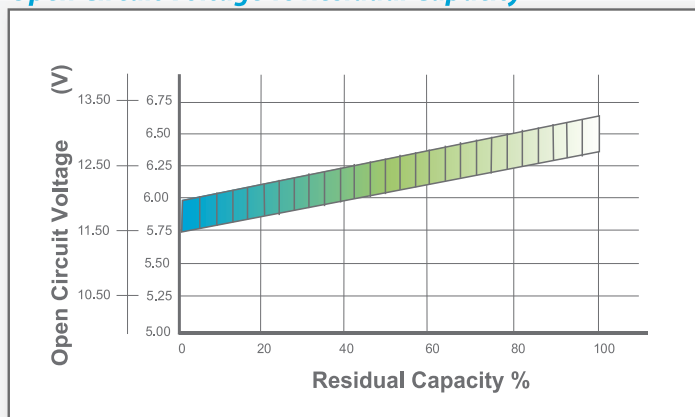

Effect of Temperature on Capacity

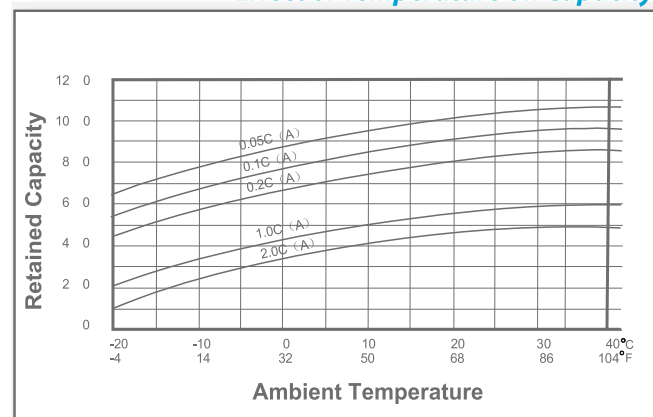

Charge Current & Final Discharge Voltage

Application	Charge Voltage(V/Cell)			Max.Charge Current	Final Discharge Voltage V/Cell	1.75	1.70	1.60	1.30
	Temperature	Set Point	Allowable Range						
Cycle Use	25°C(77°F)	2.45	2.40~2.48	.30C	Discharge Current(A)	0.2C>(A)	0.2C<(A)<0.5C	0.5C<(A)<1.0C	(A)>1.0C
Standby	25°C(77°F)	2.3	2.27~2.30						

