


SERVICE FOR THE DISTANCE
POWERSTRIDE BATTERY
US AGM L16




Dimensions (mm)

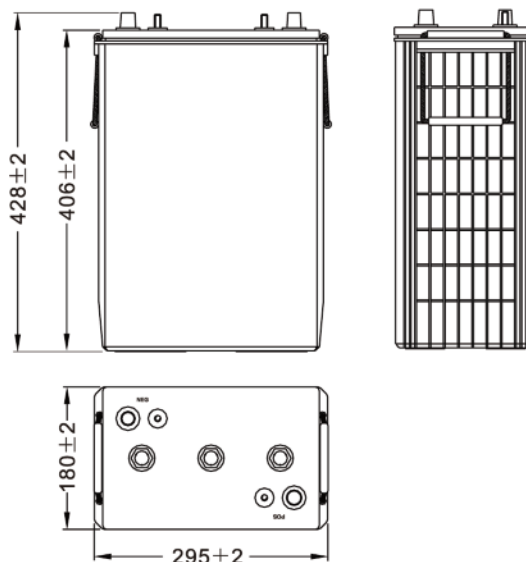


Physical Specification (mm)

Nominal Voltage		6V
Nominal Capacity(20HR)		390Ah
Nominal Capacity(5HR)		331Ah
Dimension	Length	$295 \pm 2\text{mm}(11.61\text{inches})$
	Width	$180 \pm 2\text{mm}(7.09\text{inches})$
	Container Height	$406 \pm 2\text{mm}(15.98\text{inches})$
	Total Height(with Terminal)	$428 \pm 2\text{mm}(11.42\text{inches})$
Dry Weight		/
Wet Weight		Approx 55.7Kg(122.7lbs)
Acid		$1.310 \pm 0.015\text{g/cm}^3(25^\circ\text{C})$
Standard Terminal		AM
Hold-Down		/
Cell plate qty		/
Case		Gold
Cover		Gold
Handle		Black-Material

Standard Terminal (mm)

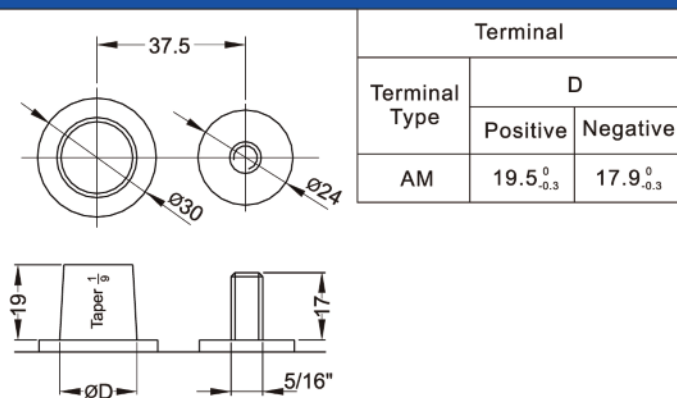

Discharge Characteristics($25^\circ\text{C}, 70^\circ\text{F}$)

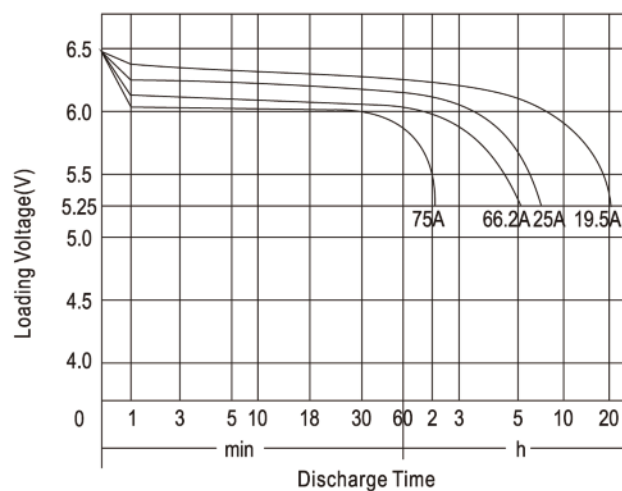

Electrical Specification

Rated Capacity	20 hour rate(19.5A)	390Ah
	5 hour rate(66.2A)	331Ah
Reserve Capacity	25Amps	915min
Reserve Capacity	75Amps	255min